MAGNI
TELESCOPIC HANDLERS

HTH
25.11

MINING &
QUARRYING

HEAVY
LOGISTICS


DEFENCE



Load chart

FRONT ATTACHMENT ON TYRES (WORLD)


ATT-03-027

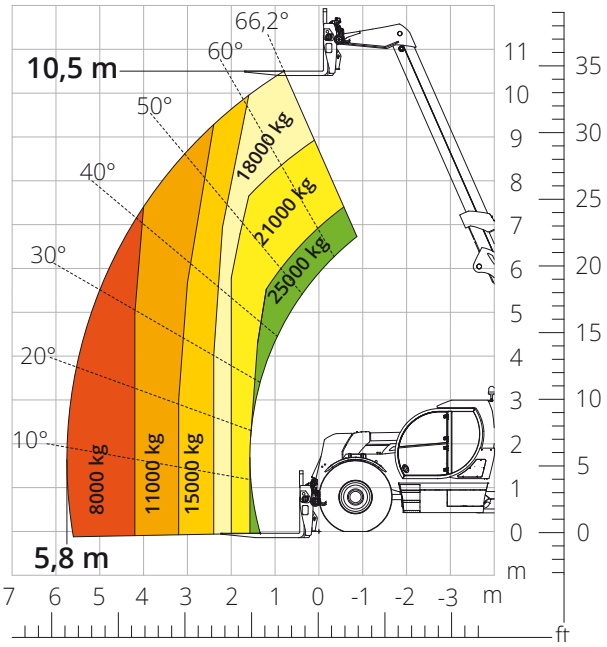

Load chart

FRONT ATTACHMENT ON TYRES (WORLD) FORK CARRIAGE WITH POSITIONER – FORK LENGTH 2,400 mm


ATT-03-028

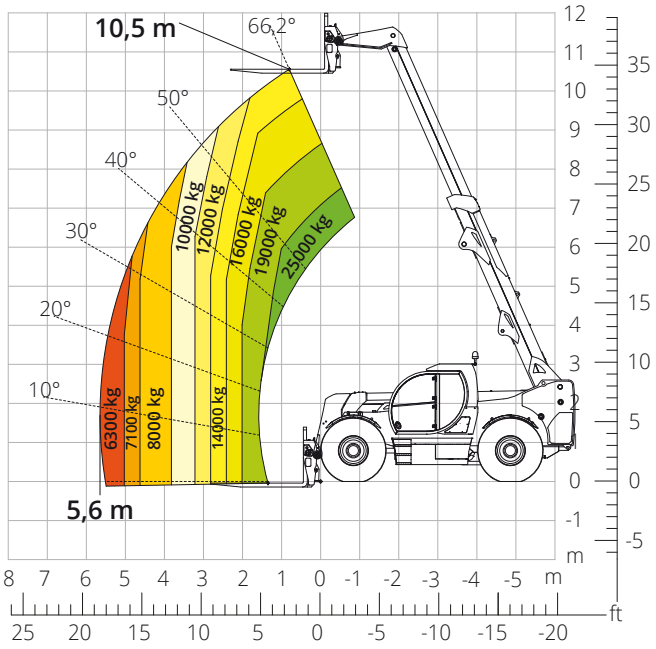

Load chart with

TYRE HANDLER, 16,000 kg


ATT-06-007

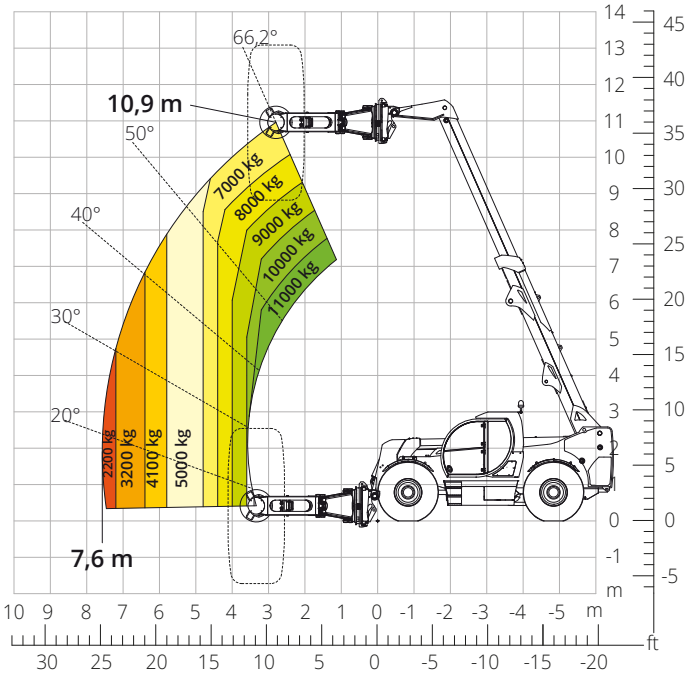

Load chart with

HOOK, 20,000 kg

ATT-05-008

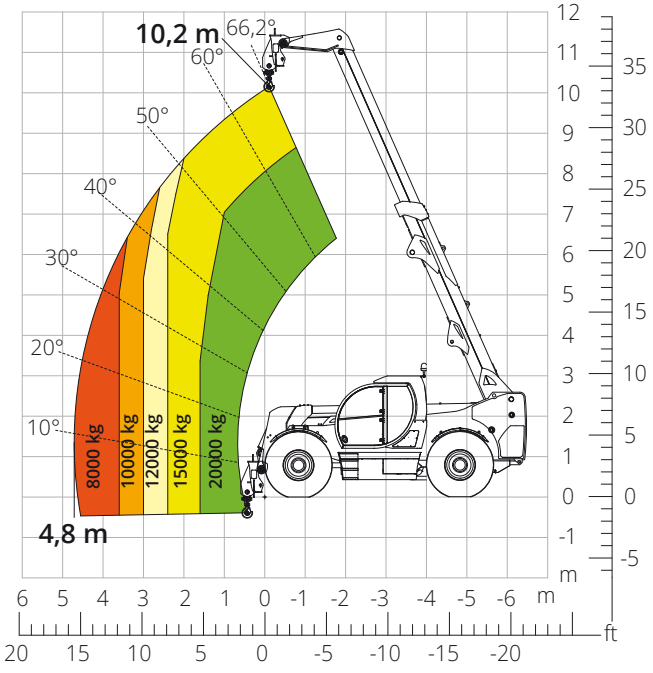



Machine model	Telescopic handler	HTH 25.11	
	Maximum lifting capacity	25,000 kg	
	Maximum lifting height	10.50 m	
	Maximum reach	5.80 m	
Engine	Model	**Volvo TAD583 VE-Stage V**	**Volvo TAD552 VE-Stage IIIA**
	Rated power	175 kW (238 hp) at 2,300 rpm	
	Maximum torque	975 Nm at 1,380 rpm	
	Displacement	5.13 l	
	Cylinders	4 in line	
	Engine type	Turbocharged direct injection common rail diesel	
	Cooling system	Water – intercooler	
Transmission	Type	Hydrostatic	
	Maximum pressure	450 bar	
	Gearbox	Dropbox, 2 speeds forward-reverse	
Axles and brakes	Type	Heavy-duty with planetary gearboxes	
	Front axle	Steering with levelling, +/-10°	
	Rear axle	Steering and oscillating	
	No. of driving - steering wheels	4WD - 4WS	
	Steering mode	Frontal/Concentric/Crab	
	Service brake	Servo-assisted pedal, acting on front and rear wheels	
	Parking brake	Hydraulic with negative action on front and rear axles	
	Tyre sizes	18,00- R 25	
Performance	Max. travel speed	25 km/h	
	Gradeability (unladen)	64%	
	Turning radius	5,410 mm	
Weights	Total unladen*	29,700 kg	
Tank and system capacities	Diesel fuel	200 l	
	AdBlue	40 l	
	Hydraulic fluid	200 l	
	Engine oil	16 l	
	Coolant	47 l	
Hydraulic circuit for movements	Circuit type	Load sensing	
	Service pump	Variable displacement	
	Max. hydraulic flow rate	165 l/min	
	Max. boom head flow rate	100 l/min	
	Max. working pressure	350 bar	
	Distributor for boom movements	Proportional hydraulic distributor	
	Movements control	Multifunction electro-proportional joystick	
Standards met	2006/42/EC: EU Machinery Directive 2016/1628: EU Regulation on the emissions of stage V engines EN 1459-X: Relating to standards on the safety requirements for variable reach machines ROPS/level 2 FOPS: relating to the standards for protective structures		

The data given in this brochure are provided for information purposes and are subject to change without prior notice.
All images are purely guideline and might not give an exact representation of the product.
**the stated weight refers to the vehicle unladen with standard equipment and may vary depending on the chosen configuration.*

HTH 25.11

DIMENSIONS (mm)

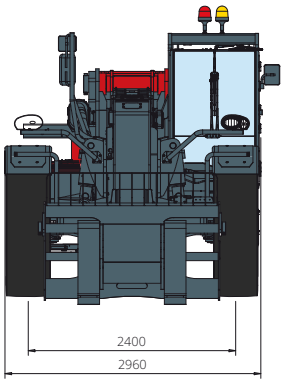


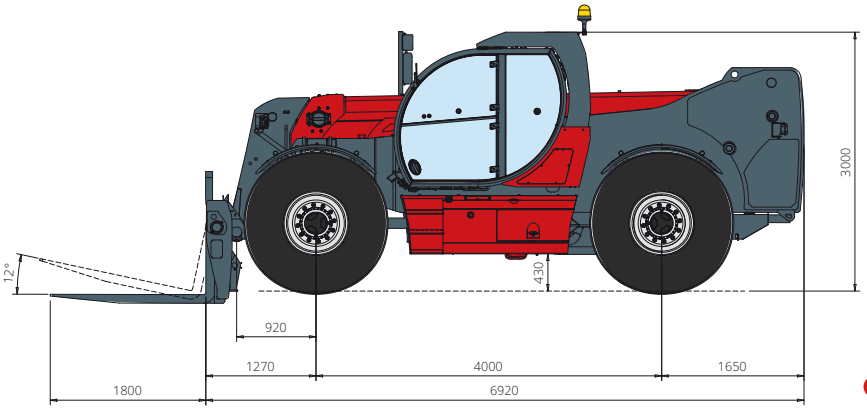

FRONT view

TOP view

SIDE view

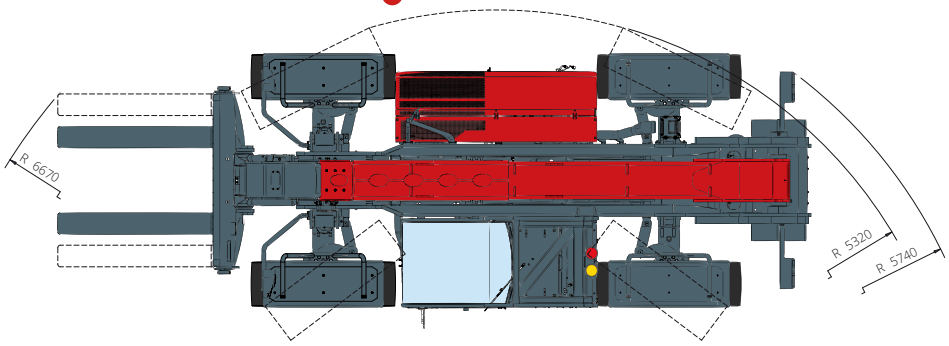

The standard machine configuration includes:

CAB

Comfort seat
Adjustable steering column
Analogue joypad
Heating
Air conditioning
FM/AM radio with USB and Bluetooth connectivity
USB Type-A (5 V) inputs

TECHNICAL SPECIFICATIONS

Q-Fit Heavy-Duty
Two-line CAN BUS system
Automatic front and rear wheel alignment
Automatic parking brake
Mechanical battery cut-off in engine compartment
Electrical system: 24 V – IP67

REAL TIME INFORMATION

Touchscreen, 7”
MCTS – Magni Combi Touch System on-board software
Automatic RFID tools recognition system
LMI – Load Moment Indicator
Onboard and remote integrated diagnostics

SERVICE

MyMagni by Trackunit connectivity system
(Free of charge on request)
Warranty: 24 months/2,000 hours